



800JP (Jazzplate)

The 800JP preamp borrows the EQ section of the famous GK800RB amplifier and squeezes it into an onboard preamp, loaded into a Jazzplate, for you Jazz bass lovers.

This tone stack has some serious high frequency power and a very deep bottom end, just like the amplifier its based on. The Hi-mid and Treble controls are highly interactive; same goes for the Lo-Mid and Bass controls.

A new feature, the **Contour** Switch, has been added to this new model. It acts as a pre-shape EQ that scoops the mids therefore changing the overall tone spectrum.

This Jazzplate comes in two options; Neck Volume and Bridge Volume or Master Volume and Blend.

These also feature a Passive Tone switch with 3 positions. Top and Middle positions apply two different filter cuts (same as a standard Tone control completely rolled off) and the Down position has no filtering. On the filtering positions the tone capacitors will interact with the Volume control (if rolled back) exactly in the same way a Jazzbass would if the Tone Control is completely rolled down. (Fun fact: this is a trick that Reggae players use to get that deep bass Reggae sound).

Installation and Warranty: This is a solderless preamp. Any tampering with the preamp (ex: soldering or unsoldering directly on the preamp or any of its components) can result in Warranty void.

-**Treble:** Boost and Cut around 4khz

-**Hi- Mid:** Boost and Cut at around 1khz


-**Bass:** Boost and Cut at around 60Hz

-**Lo- Mid:** Boost and Cut at around 250Hz

(Set the 4 EQ controls at the center position for a "flat" EQ.)

Voltage: 9 to 27VDC

Current Draw: 3mAh (9v)

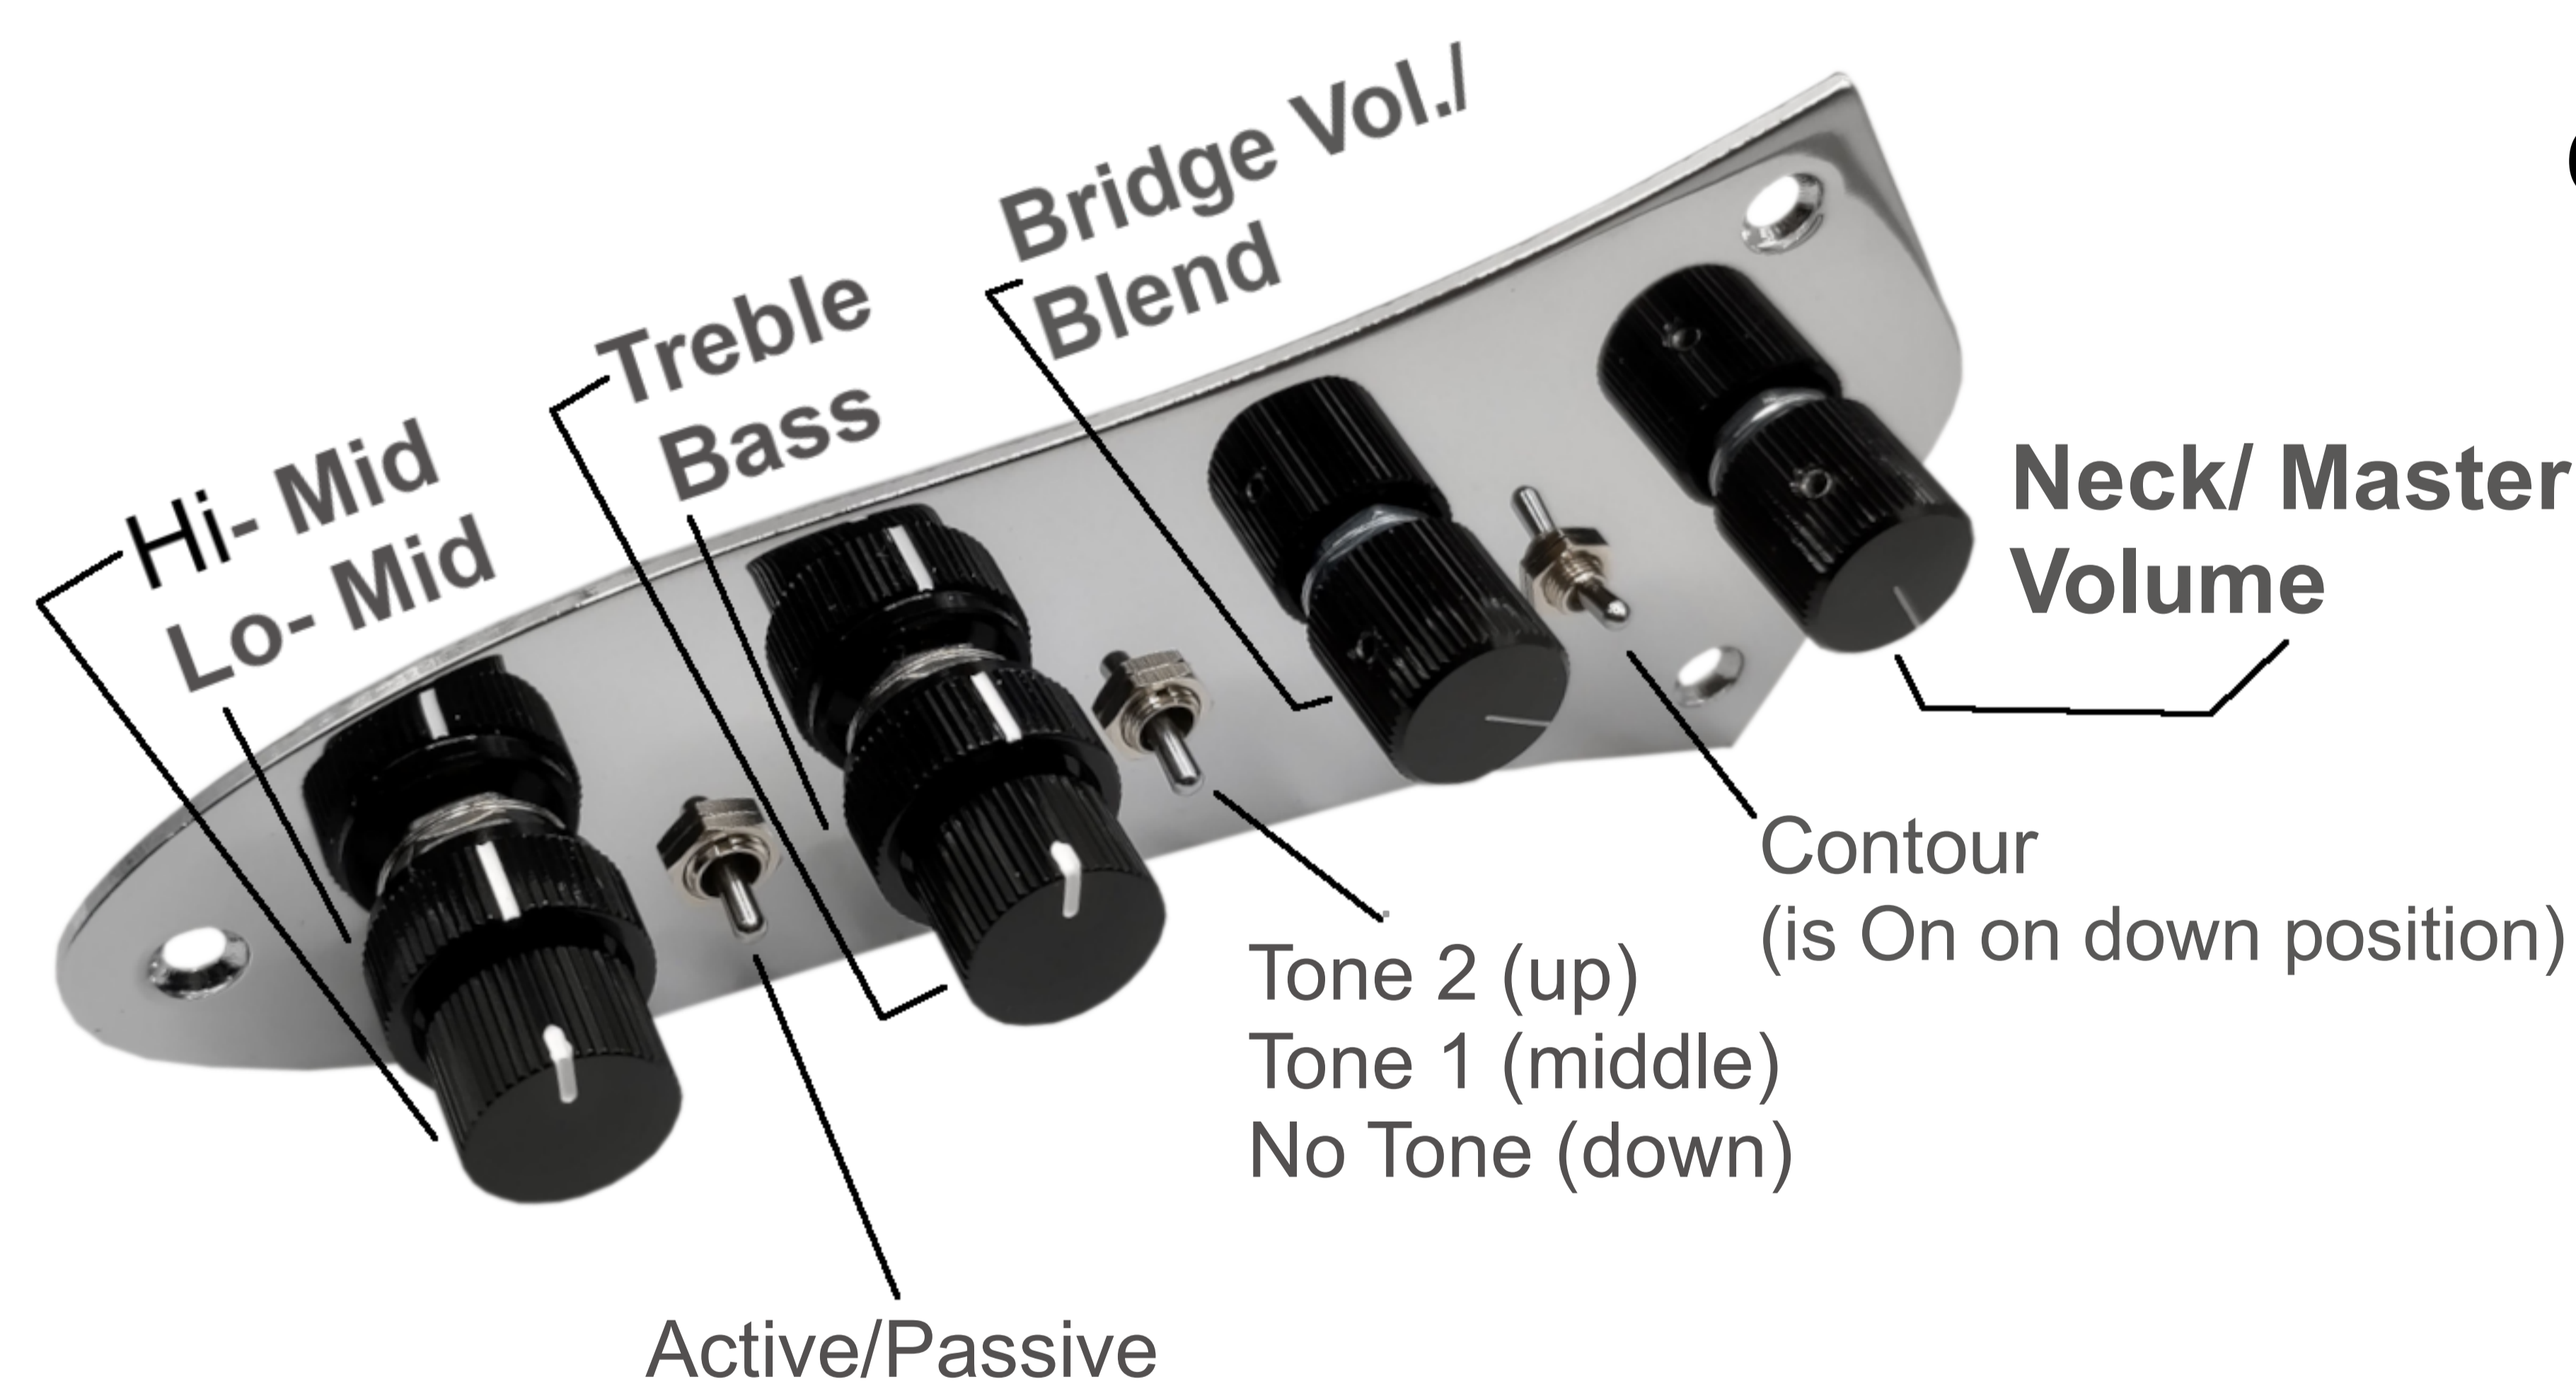

Red: + battery red wire

Black: - battery black wire




B= Hot from Bridge pickup
GND for Bridge pickup

N= Hot from Neck pickup
GND for Neck pickup



- 1- From Jack Tip (follow the colour) colour)
- 2- From Jack Sleeve (follow the colour)
- 3- From Jack Ring (follow the colour)
- 4- Extra Ground

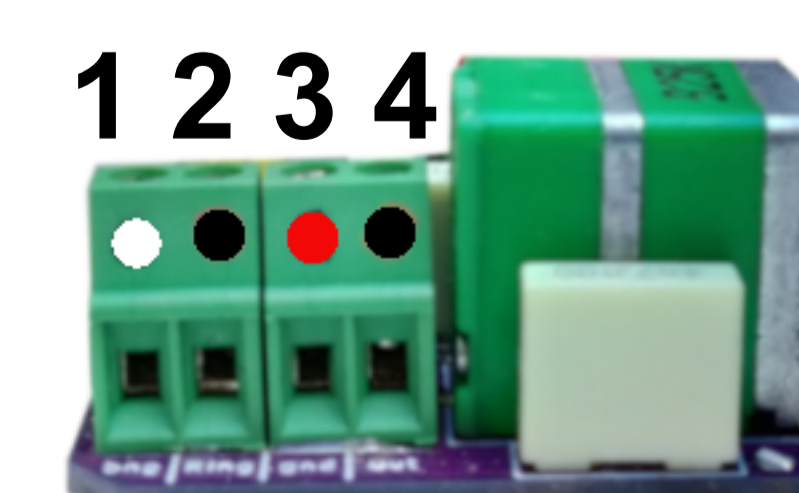

www.lusithanddevices.com

nuno@lusithanddevices.com

Warranty and Conditions: Any of our products, that are defective, will be replaced/ fixed and all expenses will be covered once it has been verified that the problem isn't a result of bad handling or negligence on the owners part. If the damage is due to negligence or wrong handling, warranty is lost and a cost can occur for the devices repair (the shipping costs will not be covered on such cases).

Warranty is valid for 2 years after the date of purchase.